

產品外觀


PRODUCT APPEARANCE

本體材質鋁合金壓鑄

Body Material: Die-cast Aluminum Alloy



Symbol



- 有效快速排除水及微粒
Quick and efficient removal of water and particles
- 10 μm / 5 μm 濾芯替換簡易方便
Quick and easy replacement of 10 μm / 5 μm filter elements

訂購代號

ORDER NO.

PF3000

02

D

B

系列	
PF	2000
PF	3000
PF	4000

配管尺寸	
01	1/8"
02	1/4"
03	3/8"
04	1/2"
06	3/4"

排水方式	
	半自動排水
H	手動排水
D	自動排水

安裝架	
	不附托架
B	附托架

規格表


SPECIFICATIONS

- 安裝前請先用空氣清理管道
Blow out the piping with compressed air before installation


機型 TYPE	PF2000-01	PF2000-02	PF3000-02	PF3000-03	PF4000-04	PF4000-06
接管口徑 PORT SIZE	G 1/8	G 1/4	G 1/4	G 3/8	G 1/2	G 3/4
最大供應壓力 Maximum Supply Pressure	15 kgf/cm ²					
最大操作壓力 Max. Operating Pressure	9.9 kgf/cm ²					
調壓範圍 Regulating Range	0.5~8.5 kgf/cm ²					
最大空氣流量 Max. Air Flow Rate	500 NL/min	500 NL/min	1700 NL/min	1700 NL/min	6200 NL/min	8200 NL/min
使用流體 Fluid	空氣 Air					
環境和介質溫度 Ambient & Media Temperature	-5~60 °C (無凍結狀態) With no freezing					
過濾精度 Nominal Filtration Rating	PF: 5 μm / PFM: 1 μm (95% filtration efficiency)					
排水杯容量 Bowl Capacity	15 cm ³	15 cm ³	20 cm ³	20 cm ³	45 cm ³	45 cm ³
杯材料 Bowl Material	聚碳酸酯 Polycarbonate					
重量 Weight	150 g	150 g	300 g	300 g	600 g	600 g

最小操作壓力 Min. Operating Pressure : N.C. - 1.5 kgf/cm²

PF2000

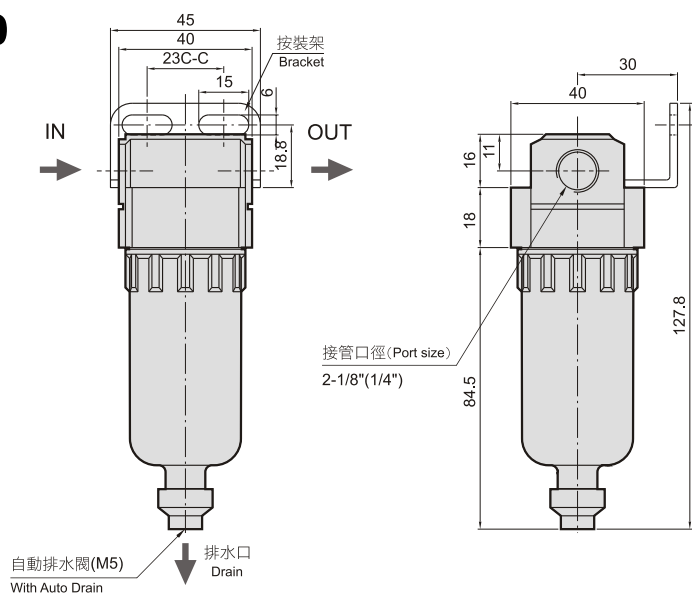

PF3000

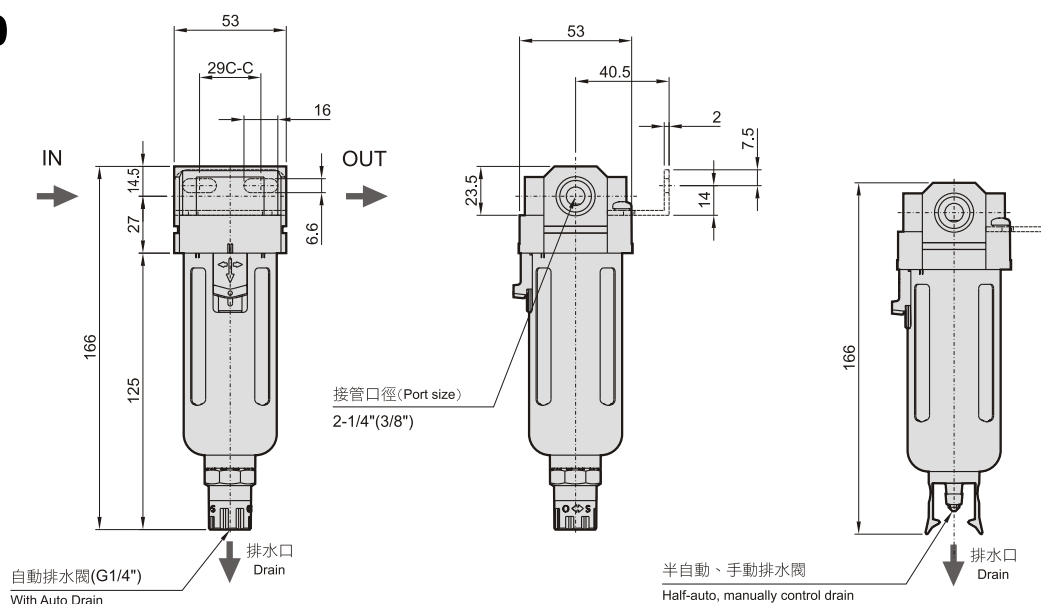

PF4000

