

產品外觀


PRODUCT APPEARANCE

本體材質鋁合金壓鑄

Body Material: Die-cast Aluminum Alloy



Symbol



- 有效快速排除水及微粒
Quick and efficient removal of water and particles
- 10 μm / 5 μm 濾芯替換簡易方便
Quick and easy replacement of 10 μm / 5 μm filter elements

訂購代號

ORDER NO.

PFM3000

02

D

B

系列	
PFM	2000
PFM	3000
PFM	4000

配管尺寸	
01	1/8"
02	1/4"
03	3/8"
04	1/2"
06	3/4"

排水方式	
D	自動排水

安裝架	
	不附托架
B	附托架

規格表


SPECIFICATIONS

- 安裝前請先用空氣清理管道
Blow out the piping with compressed air before installation


機型 TYPE	PFM2000-01	PFM2000-02	PFM3000-02	PFM3000-03	PFM4000-04	PFM4000-06
接管口徑 PORT SIZE	G 1/8	G 1/4	G 1/4	G 3/8	G 1/2	G 3/4
最大供應壓力 Maximum Supply Pressure	15 kgf/cm ²					
最大操作壓力 Max. Operating Pressure	9.9 kgf/cm ²					
調壓範圍 Regulating Range	0.5~8.5 kgf/cm ²					
最大處理量 Rate Flow (ANR)	300 ℓ/min	300 ℓ/min	700 ℓ/min	700 ℓ/min	1800 ℓ/min	1800 ℓ/min
油霧分離效率 Oil Mist Removal Efficiency	MAX 1.0 mg/m ³ (ANR) ($\approx$ 0.8 ppm)					
使用流體 Fluid	空氣 Air					
環境和介質溫度 Ambient & Media Temperature	-5~60 °C (無凍結狀態) With no freezing					
過濾精度 Nominal Filtration Rating	PF: 5 μm / PFM: 1 μm (95% filtration efficiency)					
排水杯容量 Bowl Capacity	8 cm ³	8 cm ³	20 cm ³	20 cm ³	45 cm ³	45 cm ³
杯材料 Bowl Material	聚碳酸酯 Polycarbonate					
重量 Weight	150 g	150 g	300 g	300 g	600 g	600 g

最小操作壓力 Min. Operating Pressure : N.C. - 1.5 kgf/cm²

PFM2000

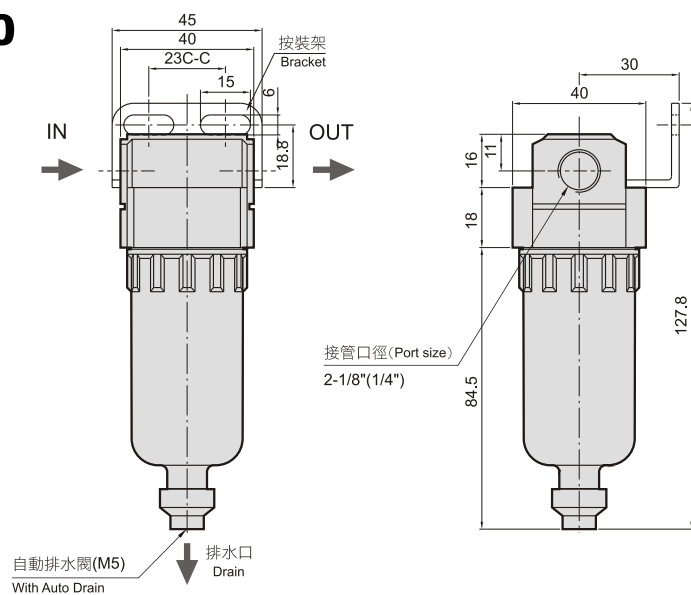

PFM3000

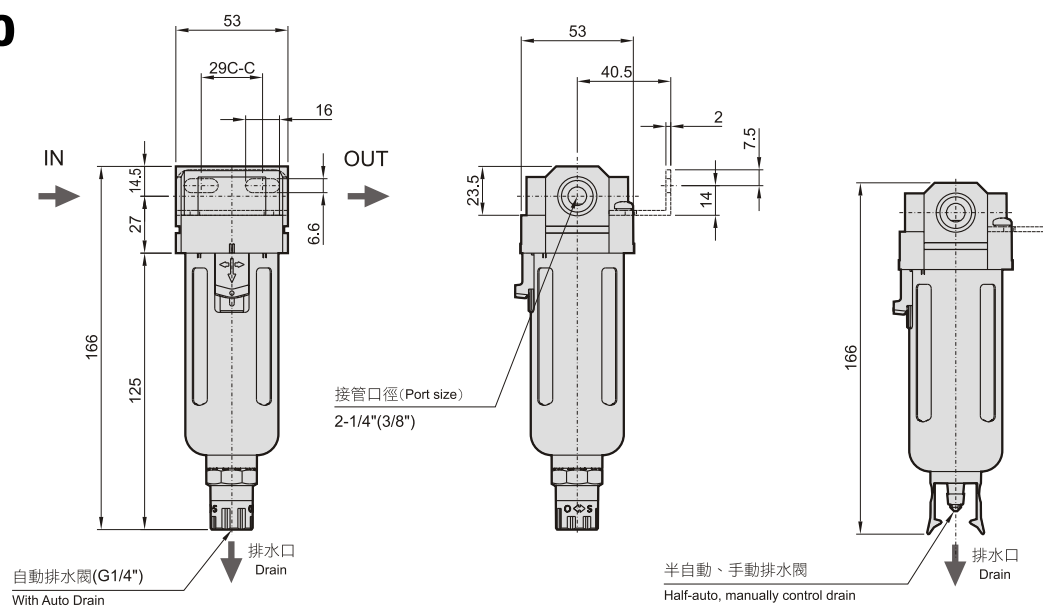

PFM4000

