

產品外觀


PRODUCT APPEARANCE

本體材質鋁合金壓鑄

Body Material: Die-cast Aluminum Alloy



Symbol



- 安裝前請先用空氣清理管道
Blow out the piping with compressed air before installation
- 細霧狀給油供應有效保護並延長機件壽命
Provides a fine oil mist for effective lubrication, protecting components and extending service life
- 請勿改變空氣流向，供氣必須由輸入口（IN）進入
Do not reverse the airflow direction. Supply air must enter through the inlet port

訂購代號

ORDER NO.

PL3000

02

B

系列	
PL	2000
PL	3000
PL	4000

配管尺寸	
01	1/8"
02	1/4"
03	3/8"
04	1/2"
06	3/4"


安裝架	
	不附托架
B	附托架

規格表


SPECIFICATIONS

機型 TYPE	PL2000-01	PL2000-02	PL3000-02	PL3000-03	PL4000-04	PL4000-06
接管口徑 PORT SIZE	G 1/8	G 1/4	G 1/4	G 3/8	G 1/2	G 3/4
最大供應壓力 Maximum Supply Pressure	15 kgf/cm ²					
最大操作壓力 Max. Operating Pressure	9.9 kgf/cm ²					
油滴最小流量 Min. Flow Rate	15 NL/min					
最大處理流量 Rate Flow (ANR)	15 ℓ/min	15 ℓ/min	30 ℓ/min	40 ℓ/min	50 ℓ/min	50 ℓ/min
使用流體 Fluid	空氣 Air					
環境和介質溫度 Ambient & Media Temperature	-5~60 °C (無凍結狀態) With no freezing					
建議用油 Recommended Oil	ISO VG32					
杯材料 Bowl Material	聚碳酸酯 Polycarbonate					
重量 Weight	140 g	140 g	640 g	640 g	700 g	700 g

PL2000

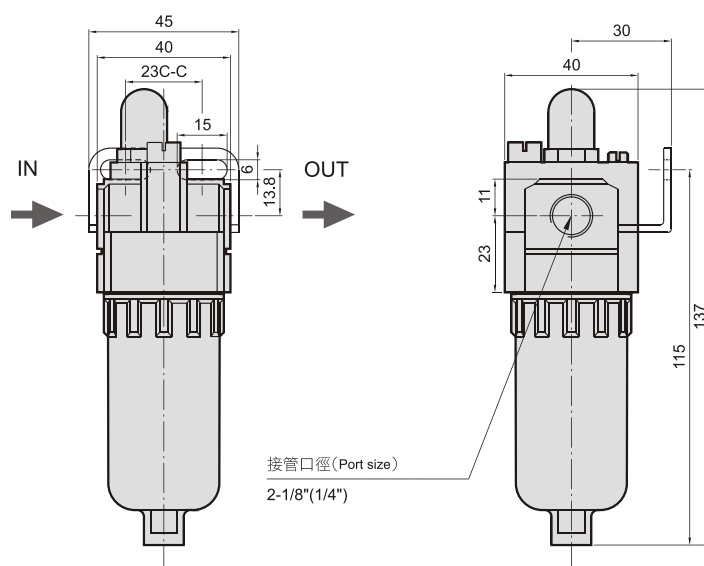

PL3000

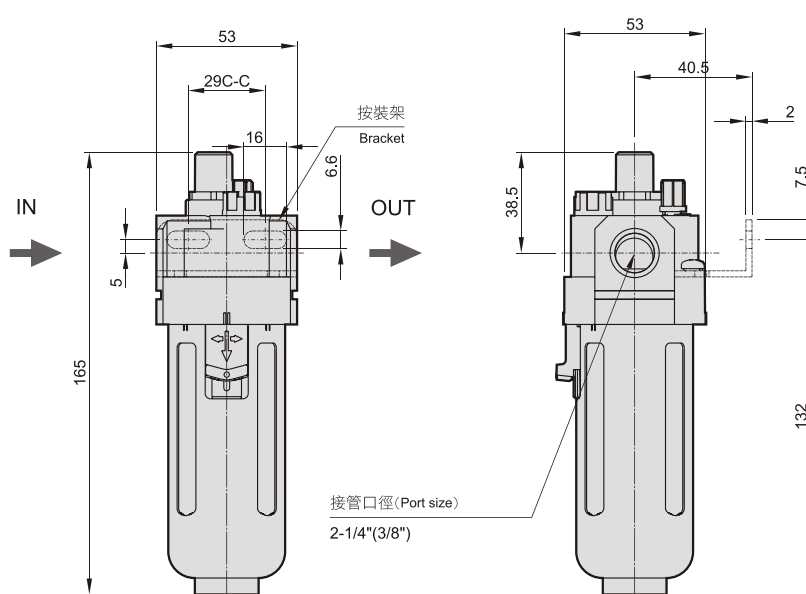

PL4000

