

產品外觀


PRODUCT APPEARANCE

本體材質鋁合金壓鑄

Body Material: Die-cast Aluminum Alloy



Symbol



• 壓力調整精準靈敏

Precise and Sensitive Pressure Adjustment

• 可盤面固定

Panel Mountable

訂購代號

ORDER NO.

PRP3000

02

K

W

系列

PRP 3000

配管尺寸

02 1/4"

03 3/8"

壓力錶

不附錶

K

圓形

GK

方形

安裝架

不附托架

W


附托架

規格表

SPECIFICATIONS

機型 TYPE	PRP3000-02	PRP3000-03
接管口徑 PORT SIZE	G 1/4	G 3/8
最大供應壓力 Maximum Supply Pressure	12 kgf/cm ²	
最大操作壓力 Max. Operating Pressure	8 kgf/cm ²	
調壓範圍 Regulating Range	0.05~6 kgf/cm ²	
壓力錶接管口徑 Port Size For Pressure Gauge	G 1/8	
使用流體 Fluid	空氣 Air	
環境和介質溫度 Ambient & Media Temperature	-5~60 °C (無凍結狀態) With no freezing	
設定感度 Setting Sensitivity	0.01 kgf/cm ²	
重量 Weight	400 g	

PRP3000

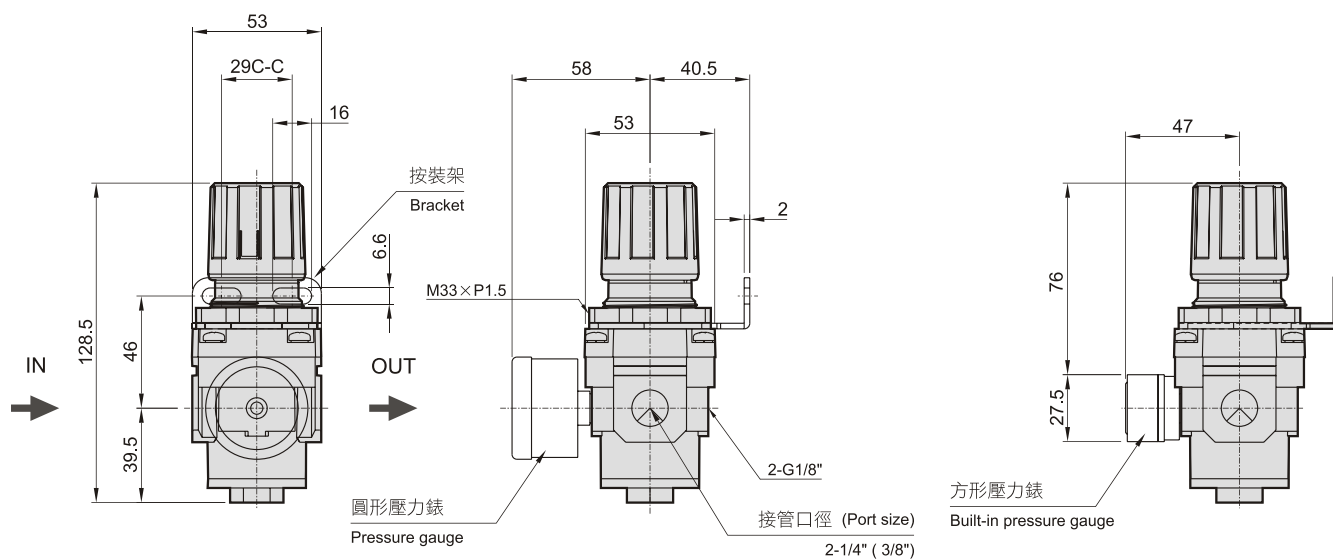

注意事項

PRECAUTIONS

- 調整壓力時，請先解除旋鈕鎖定；調整完成後，請重新鎖定旋鈕
若未依正確步驟操作，可能導致旋鈕損壞或二次側壓力發生變動

Before adjusting the pressure, unlock the adjustment knob. After the adjustment is complete, lock the knob again. Incorrect operation may damage the knob or cause fluctuations in the secondary-side pressure.



- 1 向上拉起調壓旋鈕即可解除鎖定，橘色指示線將清楚顯示
Pull up the adjustment knob to unlock it. The orange indicator line will become visible
- 2 向下按壓調壓旋鈕即可鎖定，確認橘色指示線完全隱藏
Push down the adjustment knob to lock it. Make sure the orange indicator line is completely hidden