

產品外觀

PRODUCT APPEARANCE


PS



尺寸圖

DIMENSION

DA-E

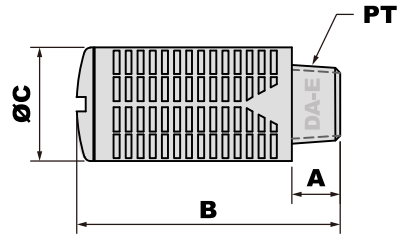

MADE IN TAIWAN

- 標準化規格，嚴格品質管控，確保產品穩定可靠

Standardized Specifications, Strict Quality Control, Ensuring Consistent and Reliable Performance

訂購代號

ORDER NO.

PS

01

系列	尺寸
PS	01 1/8
	02 1/4
	03 3/8
	04 1/2
	06 3/4
	08 1"

型 號 TYPE	PT	A	B	C
PS-01	1/8	6	33	15.5
PS-02	1/4	8	42	19
PS-03	3/8	11	58	24.5
PS-04	1/2	11	58	24.5
PS-06	3/4			
PS-08	1"			

規格表

SPECIFICATIONS

型 號 TYPE	材質 Material	使用介質 Applicable Fluid	壓力範圍 Pressure Range	溫度範圍 Temperature Range
PS-01	工程塑膠 Engineering Plastic	空氣 AIR	0-10 kgf/cm ²	0~60°C / 32~140°F
PS-02				
PS-03				
PS-04				
PS-06				
PS-08				

特點

FEATURES

- 直接鎖附於排氣口，安裝簡便，方便更換與維護
Direct threaded installation for easy replacement and maintenance.
- 提供多種螺紋尺寸，可搭配不同規格的氣動元件
Available in various thread sizes for different pneumatic applications.

適用範圍

APPLICATIONS


- 適用於各類氣動元件排氣口，可有效降低壓縮空氣排放時產生的噪音
Suitable for pneumatic exhaust ports to effectively reduce compressed-air exhaust noise.

黃色塑膠消音器



- 標準化規格，嚴格品質管控，確保產品穩定可靠

Standardized Specifications, Strict Quality Control, Ensuring Consistent and Reliable Performance

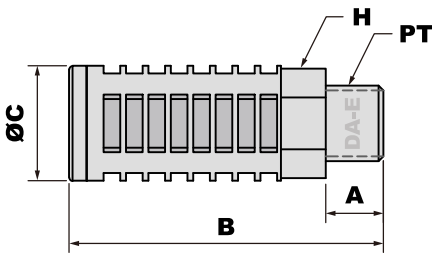

MADE IN TAIWAN

訂購代號

ORDER NO.

PSL	01	
系列	尺寸	選型
PSL	01 1/8	標準
	02 1/4	L 加長
	03 3/8	
	04 1/2	
	06 3/4	
	08 1"	

型 號 TYPE	PT	A	B	C	H
PSL-01	1/8	7	34	16	14
PSL-02	1/4	10	37	16	14
PSL-02L	1/4	10	62	20	16.8
PSL-03	3/8	12	67	26	24
PSL-04	1/2	15	70	28	24
PSL-06	3/4	16	99.3	40	31.5
PSL-08	1"	19	119	47.8	35.5

規格表

SPECIFICATIONS

型 號 TYPE	材質 Material	使用介質 Applicable Fluid	壓力範圍 Pressure Range	保證耐壓力 Proof Pressure	溫度範圍 Temperature Range
PSL-01	工程塑膠 Engineering Plastic	空氣 AIR	0-9 kgf/cm ²	11 kgf/cm ²	0~60°C / 32~140°F
PSL-02					
PSL-02L					
PSL-03					
PSL-04					
PSL-06					
PSL-08					

特點

FEATURES

- 直接鎖附於排氣口，安裝簡便，方便更換與維護

Direct threaded installation for easy replacement and maintenance.

- 提供多種螺紋尺寸，可搭配不同規格的氣動元件

Available in various thread sizes for different pneumatic applications.

適用範圍

APPLICATIONS

- 適用於各類氣動元件排氣口，可有效降低壓縮空氣排放時產生的噪音

Suitable for pneumatic exhaust ports to effectively reduce compressed-air exhaust noise.

黑色塑膠消音器

產品外觀

PRODUCT APPEARANCE

S



- 標準化規格，嚴格品質管控，確保產品穩定可靠

Standardized Specifications, Strict Quality Control, Ensuring Consistent and Reliable Performance

訂購代號

ORDER NO.

S

01

系列	尺寸	
S	M5	M5
	01	1/8
	02	1/4
	03	3/8
	04	1/2

規格表

SPECIFICATIONS

型 號 TYPE	材質 Material	使用介質 Applicable Fluid	壓力範圍 Pressure Range	保證耐壓力 Proof Pressure	溫度範圍 Temperature Range
S-M5	黃銅 Brass	空氣 AIR	0-9 kgf/cm ²	13 kgf/cm ²	0~60°C / 32~140°F
S-01					
S-02					
S-03					
S-04					

特點

FEATURES

- 直接鎖附於排氣口，安裝簡便，方便更換與維護

Direct threaded installation for easy replacement and maintenance.

- 提供多種螺紋尺寸，可搭配不同規格的氣動元件

Available in various thread sizes for different pneumatic applications.

適用範圍

APPLICATIONS


- 適用於各類氣動元件排氣口，可有效降低壓縮空氣排放時產生的噪音

Suitable for pneumatic exhaust ports to effectively reduce compressed-air exhaust noise.

尺寸圖

DIMENSION

DA-E

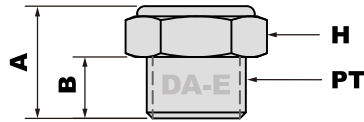

MADE IN TAIWAN

型 號 TYPE	PT	A	B	H
S-M5	M5	5	9.5	8
S-01	1/8	6	11.4	12
S-02	1/4	8.2	14.5	16
S-03	3/8	9	16	18
S-04	1/2	10.5	18	22

- 採用黃銅製成，堅固耐用，並具有良好的耐熱性與機械強度

Made of brass for excellent durability, heat resistance, and mechanical strength.

產品外觀


PRODUCT APPEARANCE

尺寸圖

DIMENSION

DA-E

SL



MADE IN TAIWAN

訂購代號

ORDER NO.

SL

01

系列

SL

尺寸

M5	M5
01	1/8
02	1/4
03	3/8
04	1/2
06	3/4

型號 TYPE	PT	A	B	H
SL-M5	M5	5	18	8
SL-01	1/8	6	23	12
SL-02	1/4	8	29	16
SL-03	3/8	9	35	18
SL-04	1/2	10	43	22
SL-06	3/4	10	50	30

- 標準化規格，嚴格品質管控，確保產品穩定可靠

Standardized Specifications, Strict Quality Control, Ensuring Consistent and Reliable Performance

規格表

SPECIFICATIONS

型號 TYPE	材質 Material	使用介質 Applicable Fluid	壓力範圍 Pressure Range	保證耐壓力 Proof Pressure	溫度範圍 Temperature Range
SL-M5	黃銅 Brass	空氣 AIR	0-9 kgf/cm ²	13 kgf/cm ²	0~60°C / 32~140°F
SL-01					
SL-02					
SL-03					
SL-04					
SL-06					

特點

FEATURES

- 直接鎖附於排氣口，安裝簡便，方便更換與維護

Direct threaded installation for easy replacement and maintenance.

- 提供多種螺紋尺寸，可搭配不同規格的氣動元件

Available in various thread sizes for different pneumatic applications.



適用範圍

APPLICATIONS

- 適用於各類氣動元件排氣口，可有效降低壓縮空氣排放時產生的噪音

Suitable for pneumatic exhaust ports to effectively reduce compressed-air exhaust noise.

銅製凸頭消音器

RSL




- 標準化規格，嚴格品質管控，確保產品穩定可靠

Standardized Specifications, Strict Quality Control, Ensuring Consistent and Reliable Performance

RSL	02
系列	尺寸
RSL	
	011/8
	021/4
	033/8
	041/2

尺寸圖DIMENSION

MADE IN TAIWAN



型 號 TYPE	PT	A	B	H	L	
					MIN	MAX
RSL-01	1/8	6	8	12	28	33
RSL-02	1/4	9	12	16	30	35
RSL-03	3/8	10	14	18	34	40
RSL-04	1/2	10	20	22	36	42

規格表SPECIFICATIONS

型 號 TYPE	材質 Material	使用介質 Applicable Fluid	壓力範圍 Pressure Range	保證耐壓力 Proof Pressure	溫度範圍 Temperature Range
RSL-01	黃銅 Brass	空氣 AIR	0-9 kgf/cm ²	13 kgf/cm ²	0~60°C / 32~140°F
RSL-02					
RSL-03					
RSL-04					

特點FEATURES

- 直接鎖附於排氣口，安裝簡便，方便更換與維護
Direct threaded installation for easy replacement and maintenance.
- 提供多種螺紋尺寸，可搭配不同規格的氣動元件
Available in various thread sizes for different pneumatic applications.
- 採用黃銅製成，堅固耐用，並具有良好的耐熱性與機械強度
Made of brass for excellent durability, heat resistance, and mechanical strength.

適用範圍APPLICATIONS

- 適用於各類氣動元件排氣口，可有效降低壓縮空氣排放時產生的噪音
Suitable for pneumatic exhaust ports to effectively reduce compressed-air exhaust noise.

銅製平頭調速消音器

RRSL



RRSL

02

系列

尺寸

RRSL

01

1/8

02

1/4

03

3/8


- 標準化規格，嚴格品質管控，確保產品穩定可靠

Standardized Specifications, Strict Quality Control, Ensuring Consistent and Reliable Performance

尺寸圖

DIMENSION

MADE IN TAIWAN



型 號 TYPE	PT	A	B	C	L	H
RRSL-01	1/8	7	7	10	38.2	9.9
RRSL-02	1/4	9.7	7	12	44.6	14
RRSL-03	3/8	10	10	15	52.6	19

規格表

SPECIFICATIONS

型 號 TYPE	材質 Material	使用介質 Applicable Fluid	壓力範圍 Pressure Range	保證耐壓力 Proof Pressure	溫度範圍 Temperature Range
RRSL-01	黃銅 Brass	空氣 AIR	0-9 kgf/cm ²	13 kgf/cm ²	0~60°C / 32~140°F
RRSL-02					
RRSL-03					

特點

FEATURES

- 直接鎖附於排氣口，安裝簡便，方便更換與維護

Direct threaded installation for easy replacement and maintenance.

- 提供多種螺紋尺寸，可搭配不同規格的氣動元件

Available in various thread sizes for different pneumatic applications.

- 採用黃銅製成，堅固耐用，並具有良好的耐熱性與機械強度

Made of brass for excellent durability, heat resistance, and mechanical strength.



適用範圍

APPLICATIONS

- 適用於各類氣動元件排氣口，可有效降低壓縮空氣排放時產生的噪音

Suitable for pneumatic exhaust ports to effectively reduce compressed-air exhaust noise.

銅製凸頭調速消音器