DGS

DGS 高壓旋轉接頭
DGS High-Pressure Rotary Joint

DA-E

MADE IN TAIWAN

產品外觀 PRODUCT APPEARANCE




- 適用於高壓流體管路，可降低軟管旋轉時產生的扭轉與應力，減少管路纏繞及軟管損耗，使配管作動更靈活


  Designed for high-pressure fluid lines, helping reduce hose twisting and torsional stress, minimize hose wear, and provide greater flexibility in piping systems.

- 適用於防止油管扭轉與纏繞，例如五軸頭、機械手臂等需要旋轉或擺動的機械設備

  Suitable for preventing hydraulic hose twisting and tangling in rotating or articulating equipment, such as 5-axis heads and robotic arms.

尺寸圖 DIMENSION

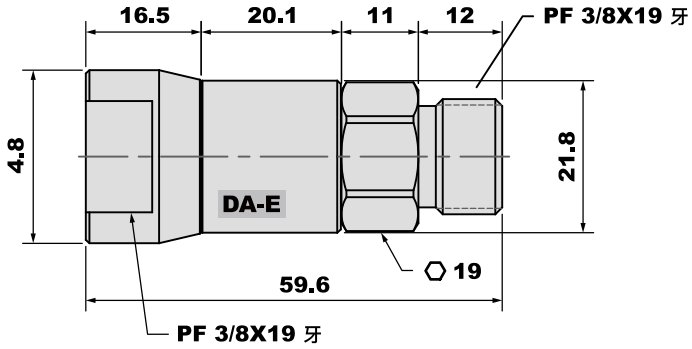



訂購代號 ORDER NO.

DGS	03
系列	尺寸
DGS	03 / 3/8

規格表 SPECIFICATIONS

型　號 TYPE	PF	孔徑 Nominal Diameter	材質 Material	最大壓力 Max. Pressure	最高溫度 Max. Temperature
DGS-03	3/8	DN 5.0	銅 Copper	230 bar	100°C

- 如產品需雷射雕刻（型號、規格、數據、流水號等），最低訂購量為 100 個，首批交期約為 60 個工作天自第二批起，每月最大產量為 300 個，並需提前下預訂單安排生產

  For products requiring laser engraving (model numbers, specifications, data, serial numbers, etc.), the minimum order quantity is 100 pcs, with an initial lead time of approximately 60 working days. From the second batch onward, the maximum monthly production capacity is 300 pcs, and advance orders are required for production scheduling.