

產品外觀


PRODUCT APPEARANCE

本體材質鋁合金壓鑄

Body Material: Die-cast Aluminum Alloy



Symbol



- 自動排水，無需手動操作

Automatic drain.

No manual operation required.

- 標準配備鐵製保護罩，防塵、耐用且可靠

Standard steel protective guard for enhanced dust protection, durability, and reliability.

訂購代號

ORDER NO.

PAD4000

04

系列

PAD	4000
PADR	4000

配管尺寸

04 1/2"

規格表

SPECIFICATIONS

機型 TYPE	PAD4000	PADR4000
接管口徑 PORT SIZE	G 1/2	
最大供應壓力 Maximum Supply Pressure	15 kgf/cm ²	
最大操作壓力 Max. Operating Pressure	10 kgf/cm ²	
調壓範圍 Regulating Range	1~9.5 kgf/cm ²	
環境和介質溫度 Ambient & Media Temperature	-5~60 °C (無凍結狀態) With no freezing	
排水口 Drain Port Size	G 1/4	
重量 Weight	680 g	620 g


注意事項

PRECAUTIONS

自動排水器使用條件 Operating Conditions for Automatic Drain

- 安裝排水管時，請使用內徑 Ø10 以上的管材，管路長度不得超過 5 公尺，並避免管路向上彎曲
Use drain tubing with an inside diameter of Ø10 or larger. The tubing length must not exceed 5 m. Avoid routing the tubing upward.
- 壓縮機功率需達 3.7 kW 以上 (400 ℓ/min 以上)
For compressors rated at 3.7 kW (400 ℓ/min) or above.

PAD4000

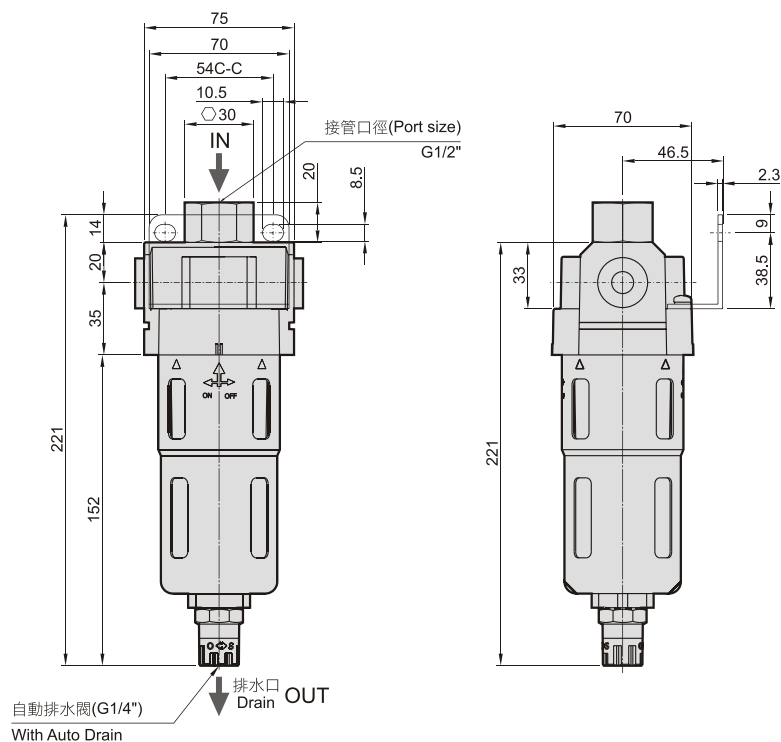

PADR4000

